


999.00 EUR
 incl. 19% VAT, plus [shipping](#)

- Pico-ITX
- SATA
- DDR-II !
- 1 Ghz CPU

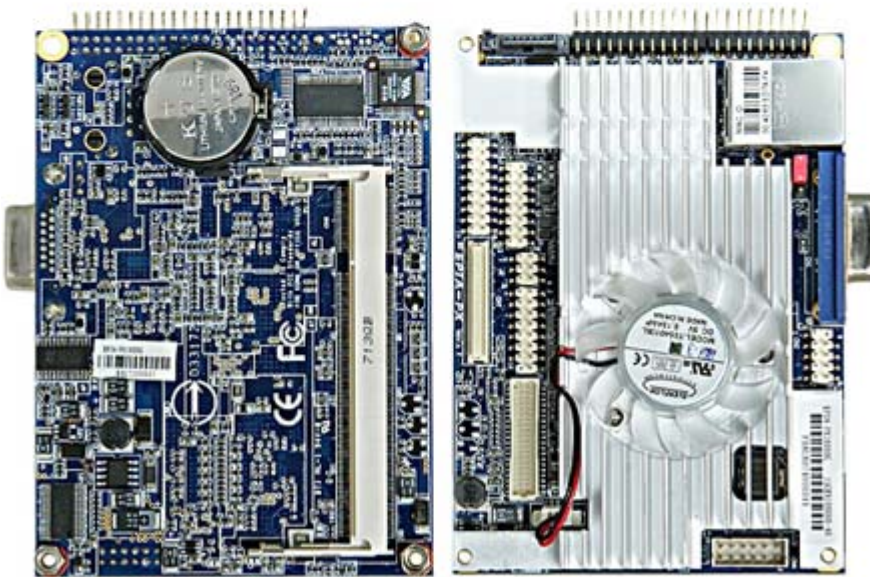

Model	• VIA EPIA PX1000G
Processor	• VIA C7 1.0 GHz - Socket NanoBGA2
Chipset	• VIA VX700 Unified Digital Media IGP Chipset

System Memory	<ul style="list-style-type: none"> • 1 DDR2 533 SODIMM socket <p>Up to 1GB memory size</p>
VGA	<ul style="list-style-type: none"> • Integrated VIA UniChrome Pro II 3D/2D AGP graphics <p>with MPEG-2/4 and WMV9 decoding acceleration</p>
Onboard IDE	<ul style="list-style-type: none"> • 1 UltraDMA 133/100/66 connector (2.0mm 44-pin header)
Onboard Serial ATA	<ul style="list-style-type: none"> • 1 SATA connector
Onboard LAN	<ul style="list-style-type: none"> • 1 VIA VT6106S 10/100Mbps Ethernet controller <p>with Power Managemen System</p>
Onboard Audio	<ul style="list-style-type: none"> • VIA VT1708A High Definition Audio Codec
Internal I/O Connectors	<ul style="list-style-type: none"> • 4 USB pin headers for 4 USB 2.0 ports • 1 COM port connector • 1 PS2 mouse/keyboard pin header • 1 LVDS/DVI connector • 1 Multimedia connector to support external TV-out interface, Video capture port interface and Low pin count interface • 1 Audio pin header for line-out, line-in, mic-in, S/PDIF in, and 7.1 channels audio output • 1 Fan pin header for CPU fan • 1 Pico-ITX power connector
External I/O Ports	<ul style="list-style-type: none"> • 1 RJ-45 LAN port • 1 VGA port
BIOS	<ul style="list-style-type: none"> • Award BIOS • 4/8Mbit flash memory
Management	<ul style="list-style-type: none"> • CPU temperature reading (manufacturing option) • Watch Dog Timer (manufacturing option) • Keyboard-Power-on, Timer-Power-on • Wake-on-LAN • System power management • AC power failure recovery
Operating Temperature	<ul style="list-style-type: none"> • 0°C – 50°C
Operating Humidity	<ul style="list-style-type: none"> • 0% ~ 95% (relative humidity; non-condensing)
Form Factor	<ul style="list-style-type: none"> • Pico-ITX 10 cm x 7.2 cm