


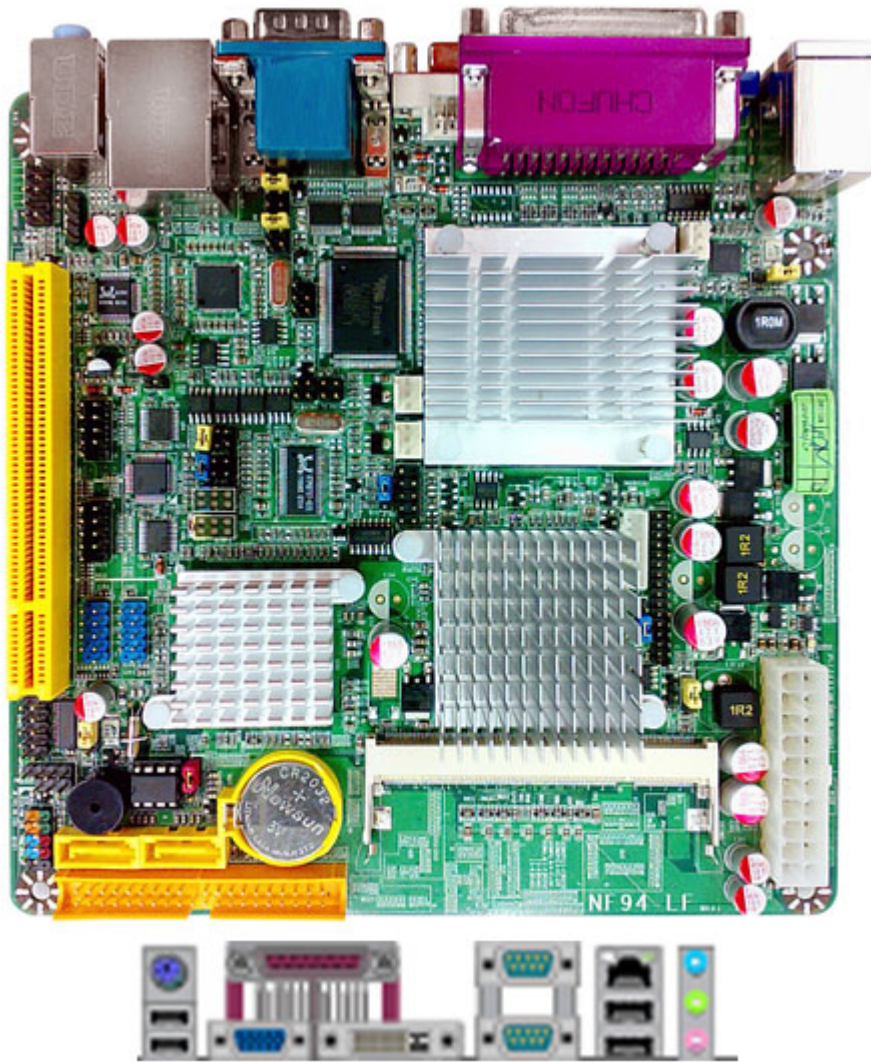

149.00 EUR
incl. 19% VAT, plus [shipping](#)

Support:  [Specifications \[EN\]](#)

- INTEL® 945GSE + ICH7M Chipset
- Support INTEL® Atom N270 CPU(45nm,512K Cache, 1.60 GHz, 533 MHz FSB)
- Build-in INTEL®GMA 950 Graphics Core
- Integrated LVDS support 18-bit TFT LCD
- Supports 1x Gigabit LAN
- Integrated ALC662 HD Audio CODEC with 6-CH
- **Support CPU smart fan**
- Mini-ITX Form Factor(170mm x 170mm)

CPU	INTEL®Atom N270 CPU(45nm,512K Cache, 1.60 GHz, 533 MHz FSB)
Chipset	INTEL® 945GSE + ICH7M chipset
Memory	Build-in INTEL® GMA 950 Graphics Core(Share Memory Size: 128/224MB)
Expansion Slots	Front Side Bus 533MHz
Storage	1 * SO-DIMM Sockets for un-buffered Single Channel DDR2 533/400 SDRAM up to 2 GB
Audio	1 * PCI slot
Ethernet LAN	2 * Serial ATA2 3Gb/s connectors
LVDS	1 * Ultra DMA 100 / 66 IDE connector
USB	Realtek ALC662 6-Channel HD Audio CODEC
	Realtek RTL8111C PCI-E Gigabit Ethernet LAN
	Onboard 18-bit dual channel LVDS connector
	Embedded 6 * USB 2.0/1.1

Special Features

Intel Diamond Ville Platform

Support ACPI S3

Support CPU Smart FAN

Support DC FAN

4 * USB 2.0/1.1 ports

1 * Keyboard connector

1 * RJ-45 port

Rear Panel I / O

3 * Audio I/O ports (Line-in, MIC and line-out)

1 * VGA port

2 * COM port for RS-232

1 * Parallel port

1 * DVI-D port

1 * USB 2.0/1.1 headers for 2 USB 2.0 ports

NB / Chassis Fan connectors;

1 * 20-pin ATX Power connector

1 * LVDS header & 1 * GPIO header

Internal I / O

1 * TV-OUT header

1 * HDTV-OUT header

1 * COM4 header for RS-422/485

1 * COM3 header for RS-232

1 * AUDIO header

BIOS

Award 8MB SPI/DIP Flash ROM

Form Factor

Mini ITX Form Factor(170mmx170mm)

Product Accessories

- COM cable
- Manual
- CD
- 2x SATA cable
- I/O shield
- 1x IDE cable
- HDTV cable