**Jetway NP93-2930 (Intel Bay Trail)**
[http://www.minipc.de/catalog/il/1895]

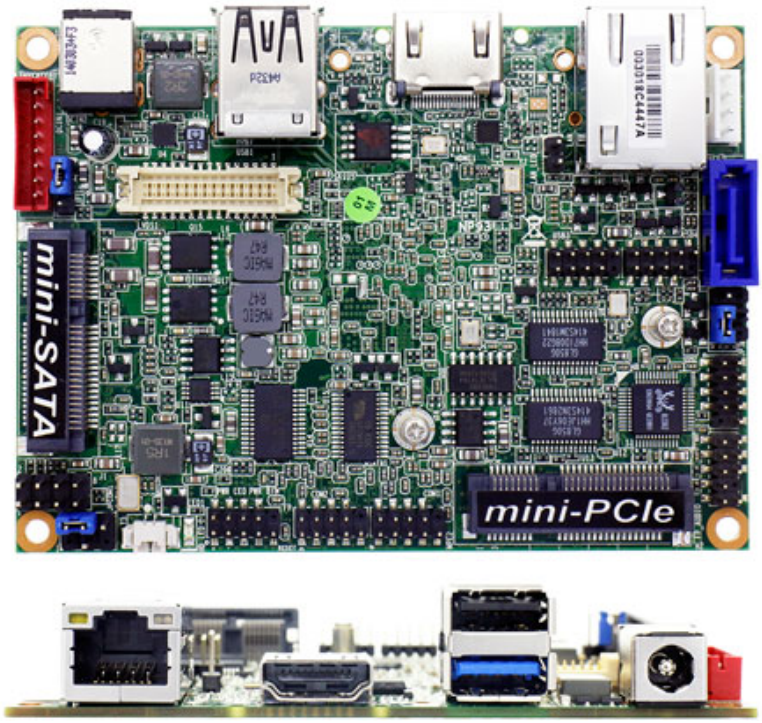


298.00 EUR
incl. 19% VAT, plus shipping

- Intel®  Bay Trail N2930 (QC, 1.83G)
- DDR3 on board  2GB
- Support 1 * Serial ATAII (3Gb/s) Device
- Integrated Realtek ALC662 HD Audio CODEC with 4-CH
- 1 * 24 bits Dual Channel LVDS header
- Support HDMI Output
- Supports 1 * Realtek RT8111G Gigabit LAN
- 100 x 72 mm Pico Form Factor

## Form Factor

| | |
|---|---|
| Dimensions | - Pico (100 X 72 mm) |

## Processor System

| | |
|---|---|
| CPU | - Intel® Celeron® Processor N2930/N2807 |
| Core Number | - by CPU |
| Max Speed | - by CPU |

| | |
|---|---|
| L2 Cache | - by CPU |
| Chipset | - SoC |
| BIOS | - UEFI |

## Expansion Slot

| | |
|---|---|
| PCI | - 0 |
| Mini-PCIe | - 1 (half size) |
| mSATA | - 1 |
| PCIe | - 0 |
| CFast Card Socket | - 0 |
| CF Card Socket | - 0 |

## Memory

| | |
|---|---|
| Technology | - 1 * DDR3 1333MHz Single CH on board |
| Max. | - 2GB |
| Socket | - 0 |

## Graphics

| | |
|---|---|
| Controller | - Intel® HD Graphics up to 854 MHz |
| VRAM | - Shared Memory |
| VGA | - No |

| | |
|---|---|
| LVDS | - 1 * Onboard 24-bits dual channel connector |
| HDMI | - 1 |
| DVI-I | - No |
| DisplayPort | - No |
| MultiDisplay | - Yes (Dual Display) |

## Ethernet

| | |
|---|---|
| Ethernet | - 10/100/1000 Mbps |
| Controller | - GbE LAN: RTL8111G |
| Connector | - 1 x RJ 45 |

## SATA

| | |
|---|---|
| Max Data Transfer Rate | - 1 * SATAII (3.0Gb/s) |

## Rear I/O

| | |
|---|---|
| VGA | - 0 |
| DVI-I | - 0 |
| HDMI | - 1 |
| DisplayPort | - 0 |
| Ethernet | - 1 |
| USB | - 2 (1 x USB 2.0 + 1 x USB 3.0) |

| | |
|---|---|
| Audio | - 0 |
| Serial | - 0 |
| eSATA | - 0 |
| PS2 | - 0 |
| DC-input | - DC in Jack 12V |

## Internal Connector

| | |
|---|---|
| USB | - 6 ( 6 x USB 2.0 via 10pin header ) |
| PS2 | - 0 |
| LVDS / inverter | - 1 |
| VGA | - 0 |
| Serial | - 1 (1x RS-232 with 5V/12V selectable header) |
| SATA | - 1 * SATAII (3.0Gb/s) |
| mPCIe | - 1 (half size) |
| Parallel | - 0 |
| mSATA | - 1 |
| CIR | - 0 |
| GPIO 8-bit | - 0 |
| Chassis intrusion | - 0 |

| | |
|---|---|
| Audio Header | - 1 |

## Watchdog Timer

| | |
|---|---|
| Output | - From Super I/O to drag RESETCON# |
| Interval | - 256 segments, 0,1,2…255sec/min |

## Power Requirements

| | |
|---|---|
| Input PWR | - 12V DC-In Jack |
| Power On | AT/ATX Supported<br>- AT : Directly PWR on as Power input ready<br>- ATX: Press Button to PWR on after Power input ready |

## Certifications

| | |
|---|---|
| Certifications | - CE, FCC, RoHS, REACH |

## Environment

| | |
|---|---|
| Temperature | - Operating: 0℃– 60℃ |
| | - Storage: -20℃– 85℃ |