


209.00 EUR
 incl. 19% VAT, plus [shipping](#)

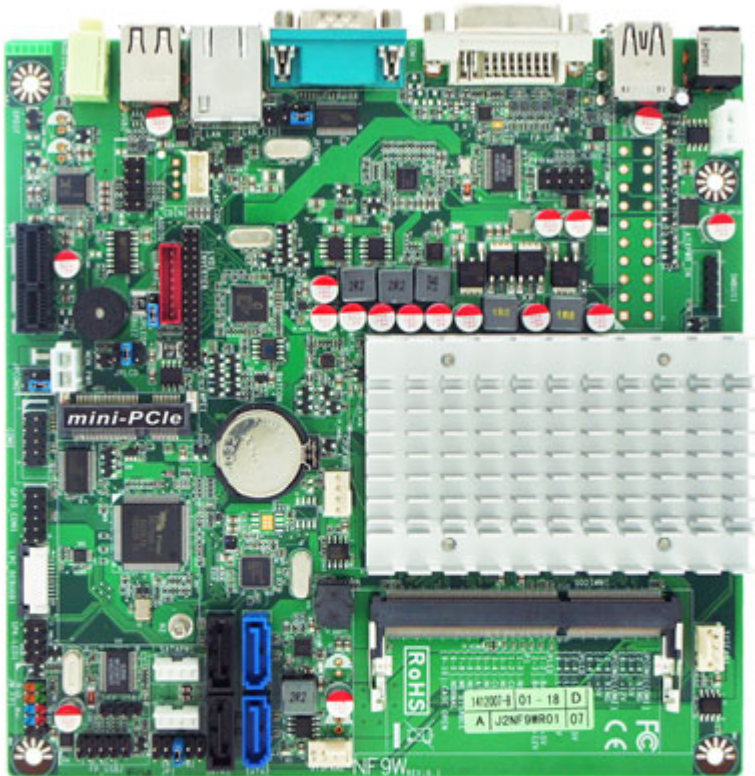

- Intel® Baytrail-M/D/I Processor
- Supports DDR3L 1333/1066 MHz, 1 x SO-DIMM, up to 8GB system memory
- 2 * Serial ATAIII (6Gb/s) + 2 * Serial ATAII (3Gb/s) Devices
- Support LVDS, DVI-I, Dual Display output
- 1 * External COM(support RS232/422/485) ,1 * Internal COM
- 1 * Realtek Gigabit LAN
- 1 * PCIe x1, 1 * mPCIe
- Support CPU Over-Temperature protection
- Support CPU Over-Current/Under Voltage protection
- Support DRAM Over-Current/Under Voltage protection
- Support CPU Smart Fan & DC Fan
- Thin Mini ITX factor (170mm x 170mm) within 20mm height

Form Factor	
Dimensions	Thin Mini-ITX (6.7-in x 6.7-in, 170 x 170mm) within 20mm height
Processor System	
CPU	Intel® Baytrail-M/D/I Celeron N2930 Processor - Supports Hyper-Threading Technology
Core Number	- (By CPU)
Max Speed	- (By CPU)
L2 Cache	- (By CPU)
Chipset	- N/A
BIOS	- AMI 64Mb Flash ROM
Expansion Slot	

PCI	- 0
Mini-PCIe	- 1
mSATA	- 0
PCIe	- 1 (x1)
CFast Card Socket	- 0
CF Card Socket	- 0
Memory	
Technology	- one Channel DDR3L 1333/1066 MHz SDRAM
Max.	- 4/8GB
Socket	- 1 x SO-DIMM
Graphics	
Controller	- Intel® Gen7 Intel® Graphics DX 11, OGL3.2
VRAM	- Shared Memory
VGA	- No
LVDS	- Dual Channel 24-bit, max resolution 1920x1200@60Hz
HDMI	- No
DVI-I	- Yes
DisplayPort	- No
MultiDisplay	- Yes (Dual Display)
Ethernet	
Ethernet	- 10/100/1000 Mbps
Controller	- GbE LAN: Realtek RTL8111G
Connector	- 1 x RJ 45
SATA	
Max Data Transfer Rate	- 2 x SATAIII (6.0Gb/s) & 2 x SATAII (3.0Gb/s)
Rear I/O	
VGA	- 0
DVI-I	- 1
HDMI	- 0
DisplayPort	- 0
Ethernet	- 1
USB	- 4 (1 x USB 3.0, 3 x USB 2.0)
Audio	- 1
Serial	- 1 (support RS232/422/485)
eSATA	- 0
PS2	- 0
DC-input	- 1 (12V DC-in JACK)
Internal Connector	
USB	- 5
PS2	- 0
LVDS / inverter	- 1/1
VGA	- 0
Serial	- 1 (with 5V/12V selectable header)
SATA	- 2 x SATAIII (6Gb/s) + 2 x SATAII (3.0Gb/s)
mPCIe	- 1
Parallel	- 0
mSATA	- 0
CIR	- 0
GPIO 8-bit	- 4in / 4 out
Chassis intrusion	- 1 (via 12pin header)
Audio Header	- 1 x FP_AUDIO ,1 x 2CH Line Out ,1 x MIC ,1 x 2CH Audio
SMBUS(I2C)	- 1
Watchdog Timer	
Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments, 0,1,2...255sec/min

Power Requirements	
Input PWR	- 12V DC-In Jack
Power On	AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
Certifications	
Certifications	- CE, FCC, RoHS, REACH
Environment	
Temperature	- Operating: 0■ – 60■
	- Storage: -20■ – 85■