


999.00 EUR  
 incl. 19% VAT, plus [shipping](#)

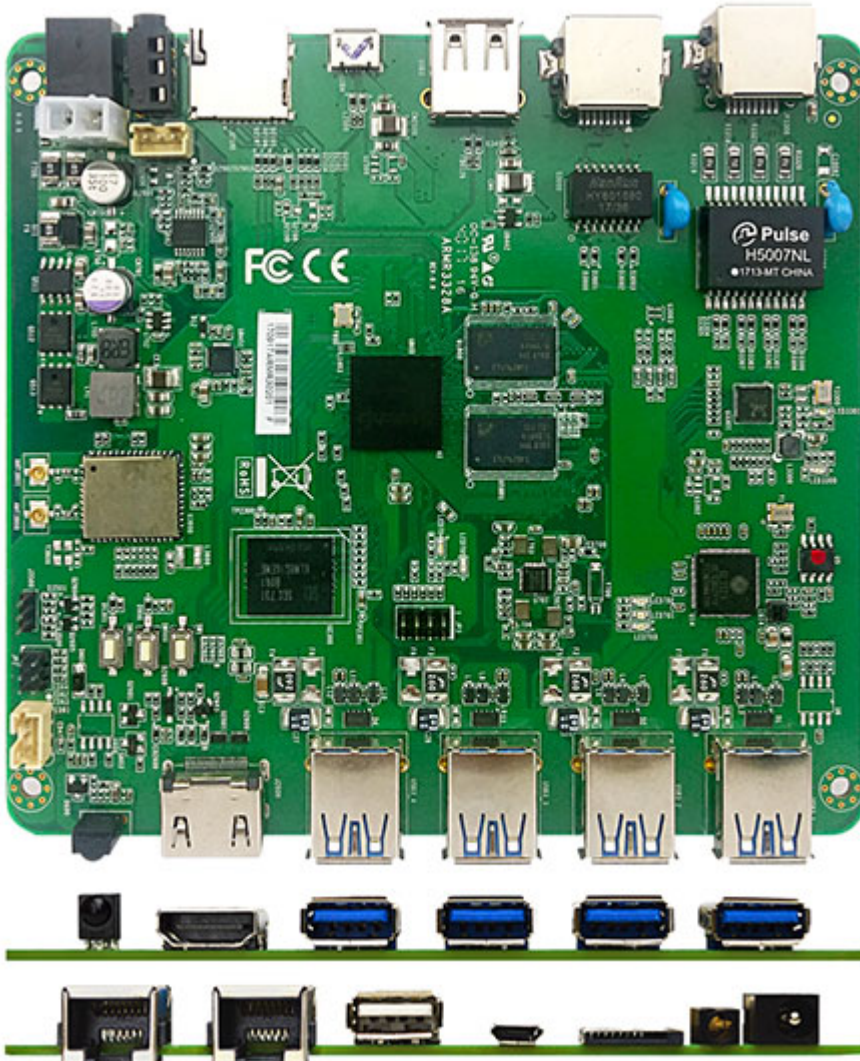

Support: [Jetway ARM Overview](#)

- Rock chip® ARM Cortex A53 RK3328 Quad-core 1.5GHz
- Onboard 1333/2GB DDR3L DRAM up to 4GB
- Onboard 8G Flash ROM up to 32GB
- Support 1 \* Micro SD Socket (Max 64G)
- 1 \* REALTEK Gigabit LAN external PHY, 4 \* USB3.0, 1 \* USB2.0, 1 \* OTG, 1 \* HDMI
- Support 4K VP9 and 4K 10bit H265/H264 video decoding up to 60fp
- Support 1080P H.264 / H.265format video encoding
- Supported with HDR10 and HLG modes
- Support Android 7.1, Linux 4.4
- 130mm \* 120mm

Model / Part Number	
Model	– JARM3328A-2N
Part Number	– JARM3328A-2N
Form Factor	
Dimensions	– 130 * 120mm
Processor System	
CPU	– Rock chip® ARM Cortex A53 RK3328 1.5GHz
Core Number	– Quad-core
Max Speed	– 1.5G

L2 Cache	- 0
Chipset	- Rock chip® ARM Cortex A53 RK3328 SOC
BIOS	- 0
PMU	- Rock chip® RK805-1
<b>Expansion Slot</b>	
Mini-PCle	- 0
TF Card Socket	- 1
SIM Card Holder	- 0
<b>Memory</b>	
Technology	- Onboard DDR3L 1333MHz2GB
Max.	- 4GB
Flash Rom	- 8GB (Max 32GB)
<b>Graphics</b>	
Controller	- (by CPU)
VRAM	- Shared Memory
LVDS	- 0
HDMI	- 1 (2.0)
MIPI	- 0
DisplayPort	- 0
MultiDisplay	- Single Display
<b>Ethernet</b>	
Ethernet	- 10/100/1000 Mbps; 10/100 Mbps
Controller	- 1 * Realtek RTL8211F-CG Gigabit LAN - 1 * 10/100 Mbps internal FE PHY
Connector	- 2 * RJ 45
<b>Audio</b>	
CODEC	- HD Audio: SGM89000
Channel	- 2 Channels
<b>Special Features</b>	
WIFI	- 802.11 a/b/g/n/ac,5.0G
WIFI Chip	- RTL8822BS
Bluetooth	- BT-V4.1 SDIO BLE
OS	- Android 7.1, Linux 4.4
<b>Rear I/O</b>	
HDMI	- 1 (3840 x 2160@60Hz)
Ethernet	- 0
USB	- 4 (4* UB3.0)
IR	- 1
Audio	- 1 (Line-out +MIC)
<b>Front I/O</b>	
Audio	- 1 (Line-out +MIC)
USB	- 6 (4* UB3.0 + 1* USB2.0 + 1 * OTG)
Ethernet	- 2
TF Card Socket	- 1
DC-input	- 1

<b>Power Requirements</b>	
Input PWR	– 5 ~ 12V DC-in (PWR Con)
Power On	AT/ATX Supported – AT : Directly PWR on as Power input ready – ATX: Press Button to PWR on after Power input ready
<b>Certifications</b>	
Certifications	– RoHS, REACH, CE, FCC (Option)
<b>Environment</b>	
Temperature	– Operating: -10°C ~ 60°C
	– Storage: -20°C ~ 65°C
<b>Warranty</b>	
Warranty	– 2 Years Limited Warranty