


219.00 EUR
 incl. 19% VAT, plus [shipping](#)

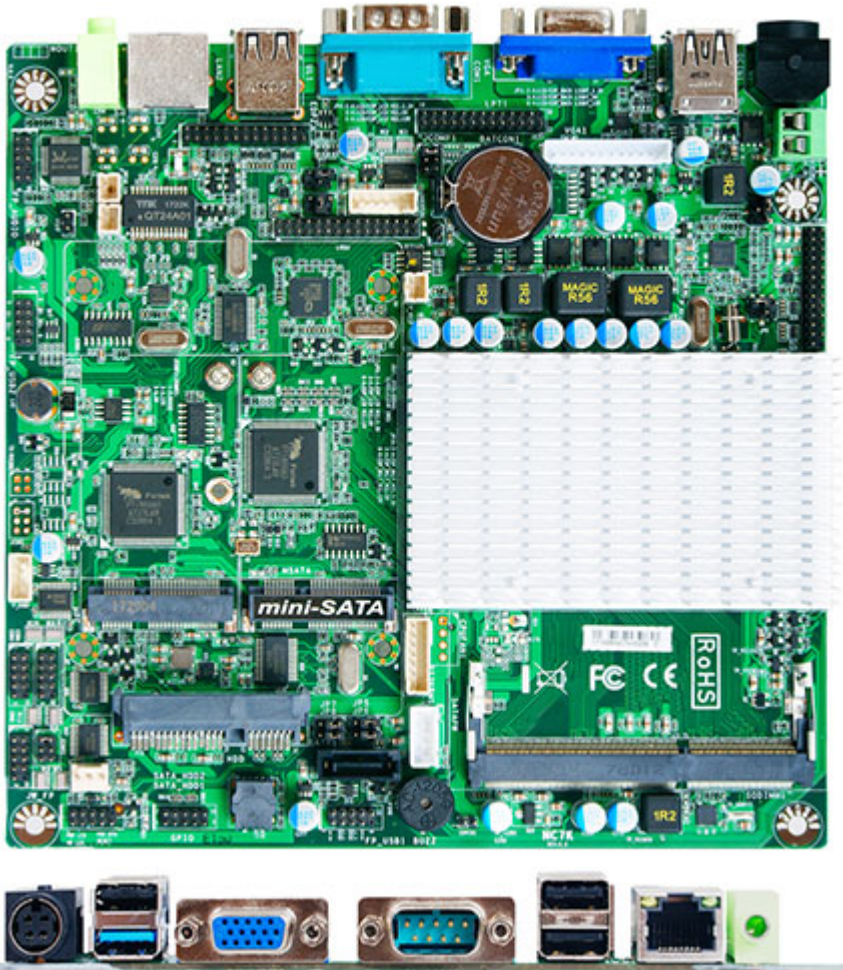

- Intel® Bay Trail-D J1900 SOC (CO-LAY N2930)
- Onboard INTEL® J1900 2.0GHz Quad Cores CPU
- Support 1* DDR3/1333 SO-DIMM Max 8GB
- 1* GbE, 1* USB3.0, 8* USB2.0, 4* COM (COM1/2 Support 5V/12V)
- Support 1 * SIM Card(Optional)
- Support CRT+ EDP+LVDS Display(Co-lay CRT +2*EDP)
- Thin Mini-ITX Form Factor(170 x170mm)

Form Factor	
Dimensions	– Thin Mini-ITX (170 x 170mm)
Processor System	
CPU	– Intel® Bay Trail-D J1900
Core Number	– 4
Max Speed	– Turbo Boost 2.42GHz
L2 Cache	– 2MB
Chipset	– SoC
BIOS	– AMI 64M Flash ROM
Expansion Slot	
PCI	– 0
Mini-PCIe	– 1 (Full size)
mSATA	– 1
PCIe	– 0

M.2	- 0
SIM Card Holder	- 1
Memory	
Technology	- DDR3L 1333MHz DRAM
Max.	- 8GB
Socket	- 1 * SO-DIMM
Graphics	
Controller	- Intel® HD Graphics
VRAM	- Shared Memory
VGA	- 1 (Max Resolution: 2560 x 1600@60Hz)
LVDS	- 1 (CO-Lay eDP)
eDP 1.3	- 1 (Max Resolution: 2560x1600@60Hz)
HDMI	- 0
Display Port	- 0
MultiDisplay	- Yes (Dual Displays)
Ethernet	
Ethernet	- 10/100/1000 Mbps
Controller	- 1 * RTL8111G Gigabit LAN
Connector	- 1 * RJ 45
Audio	
CODEC	- HD Audio : Realtek ALC662
Channel	- FP_AUDIO, 3W Amplifier Speaker out
SATA	
Max Data Transfer Rate	- 1 * SATAII (3.0Gb/s)
Rear I/O	
VGA	- 1
DVI-D	- 0
HDMI	- 0
Display Port	- 0
Ethernet	- 1
USB	- 1* USB 3.0 + 3* USB2.0
Audio	- 1 (Line-out)
Serial / Parallel	- 1 (RS232, Support 5/12V)
PS2	- 0
DC-input	- 1
Internal Connector	
USB	- 5 * USB 2.0
PS/2	- 1
LVDS / inverter	- 1 (Co-lay EDP2)
eDP	- 2 (EDP2 Co-lay LVDS)
VGA	- 1
Serial	- 3 (COM2 Support 5V/12V)
SATA	- 1 * SATAII (3.0Gb/s)(Co-lay 7+15pin SATA+SATA Power Connector)
mPCIe	- 1 (Full size)
Parallel	- 1

m-SATA	- 1
GPIO	- 8bit
Chassis intrusion	- 1
Audio Header	- 1
SMBUS/ I2C	- 0
AT mode	- 0
TPM Header	- 0
Others	- 0
Watchdog Timer	
Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments (0 ~ 255sec)
Power Requirements	
Input PWR	- +12V DC-in (2-pin PWR Con)
Power On	AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
Certifications	
Certifications	- CE, FCC, RoHS, REACH
Environment	
Temperature	- Operating: -10°C – 60°C
	- Storage: -20°C – 85°C
Warranty	
Warranty	- 2 Years Limited Warranty