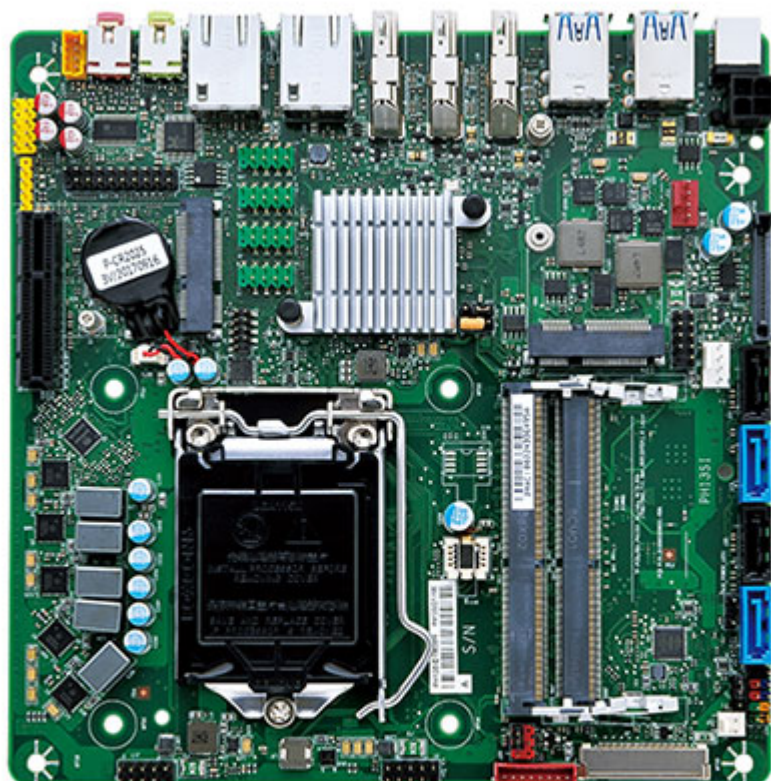


999.00 EUR

incl. 19% VAT, plus [shipping](#)**Support:** [Specifications](#) | [MiAPI Interface](#)

- Support Intel Kabylake / Skylake processors
- Dual channel DDR4 260-pin SO-DIMM(up to 32GB)
- Intel® vPro business-grade technology support
- Dual high speed Gigabit Ethernet connection
- Two PCI Express Mini Card connector for expansion
- Features 4 SATA3 (6Gbps)
- Triple display connectivity by HDMI
- Embedded LVDS or eDP connectivity (BOM Option)
- Onboard 4 serial ports

Item**Spec**

Form Factor

Low-profile Mini-ITX (20 millimeters [0.79 inches] x 170.18 millimeters [6.7 inches] x 170.18 millimeters [6.7 inches])

Processor

CPU Type : Intel Skylake / Kabylake Processor

CPU Core : Dual Core / Quad Core

Socket : Socket LGA1151

TDP : Support up to 65W CPU types

Chipset

Chipset Series : Intel® Q170 Chipset

Memory

Memory Type: DDR4 SODIMM @1.2V, 2133/2400MHz (Unbuffered Non-ECC)

Memory Channel: Dual Channel

Memory Capacity : Support total up to 32GB

ECC Support : No

Audio

Memory Socket: 260-pin So-DIMM socket

Codec: HD audio codec, Realtek ALC662

Expansion Capability	PCIe 3.0 x 4 slot	1
	PCI Express Full-/Half-Mini Card slot (PCIe/USB/SATA)	1
	PCI Express Half-Mini Card slot (PCIe/USB)	1
	HD-out	3
External I/O	USB 3.0	4
	RJ-45	2
	Line-Out	1
	Mic-In	1
Internal I/O	DC-In	1
	40PIN Header LVDS Connector	1
	front audio Header (Mic/HP)	1
	standard header for DMIC	1
	audio header to support system stereo speaker	1
	USB 2.0 2 x 5 header	3
	Serial port header	4
	MiAPI Programmable header	1
	SATA 3.0 6Gb/s (support RAID 0,1)	4
	CPU fan header	1
Security	Nuvoton NCT6104D	
LAN Support	Intel® I219 Gigabit (10/100/1000 Mb/s) LAN	
	Intel® I210 Gigabit (10/100/1000 Mb/s) LAN	
BIOS	Support for Advanced Configuration and Power Interface (ACPI) setting	
	Suspend to RAM support	
Instantly Available PC Technology	Wake on PCI Express, LAN, front panel, serial, and USB ports	
	Hardware monitoring through the Nuvoton6104D legacy I/O controller, including:	
Hardware Monitor Subsystem	Remote thermal sensor	
	Speed control for 4-pin system fan header and 4-pin CPU fan header	
Power Requirement	DC-in 12V(2.5mm/ ID, 5.5mm/ OD)/ ATX 4pin 12V	
Environment	Operating Temperature: 0 °C to +60 °C	
	Storage Temperature: -20°C to +70°C	
OS Support	Skylake: win7, win8.1, win10, linux support by request	
	Kabylake: win10, linux support by request	
Safety	CE	
	FCC	