



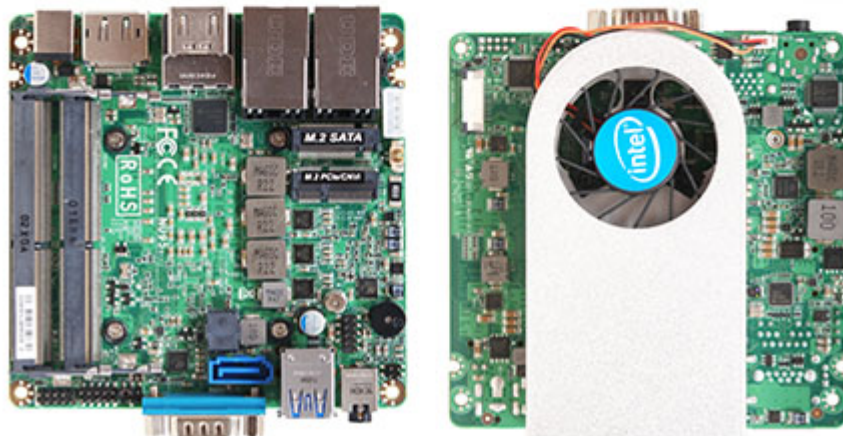

198.00 EUR  
 incl. 19% VAT, plus [shipping](#)

- Intel Comet Lake !
- NUC Formfactor !
- Support Triple Displays !

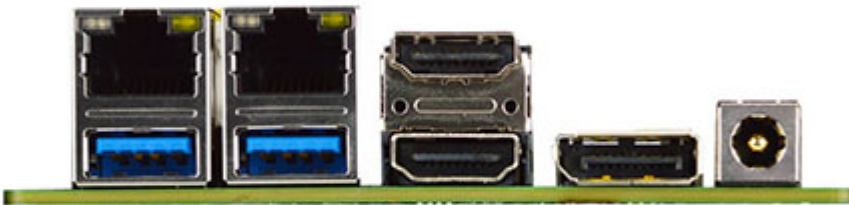

- Intel® Celeron® Prozessor 5205U
- 2\* DDR4 2666MHz up to 64GB
- 1\* Intel® I219LM GbE, 1\* Intel® i211AT GbE
- 1\* SATAIII, 1\* M.2 (M key), 1\* M.2 (E key) Support CNVi
- 2\* HDMI, 1\* DP
- 1\* RS232/422/485, 4\* USB3.2, 2\* USB2.0
- 12~24V DC in
- NUC Form Factor (101 \*101 mm)

|       |               |
|-------|---------------|
| Model | – JNU95-5205u |
|-------|---------------|

|                    |  |
|--------------------|--|
| Form Factor        | – NUC (101 * 101mm)  |
| Processor System   | – Intel® Celeron® Prozessor 5205U<br>– SoC chipset<br>– AMI 128M Flash ROM BIOS  |
| Expansion Slot     | – 1* M.2 M key (2242, SATA interface)<br>– 1* M.2 E key (2230, Support CNVi)<br>– 1* SATAIII   |
| Memory             | – 2* DDR4 2666 MHz SO-DIMM up to 64GB  |
| Graphics           | – 1* HDMI1.4 (Max Resolution : 4096x2304@30Hz)<br>– 1* HDMI2.0 (Max Resolution : 4096x2304@60Hz)<br>– 1* DP (Max Resolution : 4096x2304@60Hz)<br>– Support Triple Displays |
| Ethernet           | – 1* Intel® I219LM GbE<br>– 1* Intel® i211AT GbE   |
| Audio              | – HD Audio: Realtek® ALC662  |
| SATA               | – 1* SATAIII (6.0Gb/s)   |
| Rear I/O           | – 2* HDMI<br>– 1* DP<br>– 2* RJ45<br>– 2* USB3.2 (Gen2)<br>– 12~24V DC-in  |
| Front I/O          | – 1* Audio (Line-out, MIC)<br>– 1* RS232/422/485 (Support 5/12V TTL)<br>– 2* USB3.2 (Gen2)   |
| Internal Connector | – 2* USB2.0<br>– 1* SATAIII (6.0Gb/s)<br>– 1* M.2 (M key)<br>– 1* M.2 (E key)<br>– 1* GPIO (8bit, 5V)<br>– 1* AT mode  |
| Watchdog Timer     | – From Super I/O to drag RESETCON#<br>– 256 segments (10 ~ 255min)   |
| Power              | 12~24V DC-in, AT/ATX Supported<br>– AT: Directly PWR on as Power input ready<br>– ATX: Press Button to PWR on after Power input ready                                      |
| Compliance         | – CE, FCC, RoHS, REACH   |
| Temperature        | – Operating: 0°C ~ 60°C<br>– Storage: -20°C ~ 85°C<br>– Humidity: 10% ~ 90% RH @40°C (non-condensing)  |
| OS Support         | – Windows 10, Linux  |