


1. INTEL® Cedar Trail-D Processor D2550 + ICH10R Chipset
2. Support 2 \* DDR3 1066MHz Single CH up to 8GB
3. Support 5 \* Serial ATAI (3Gb/s) with RAID 0, 1, 5 & 10
4. Realtek ALC662 6-CH HD Audio CODEC
5. 1 \* 24 bits Dual Channel LVDS header
6. Supports 1 \* Intel 82574L Gigabit LAN
7. Support Jetway PCI-E Daughter card
8. Support Watch dog Technology
9. Support CPU Smart FAN
10. Compliance with ErP standard
11. Mini-ITX Form Factor (170mm x 170mm)

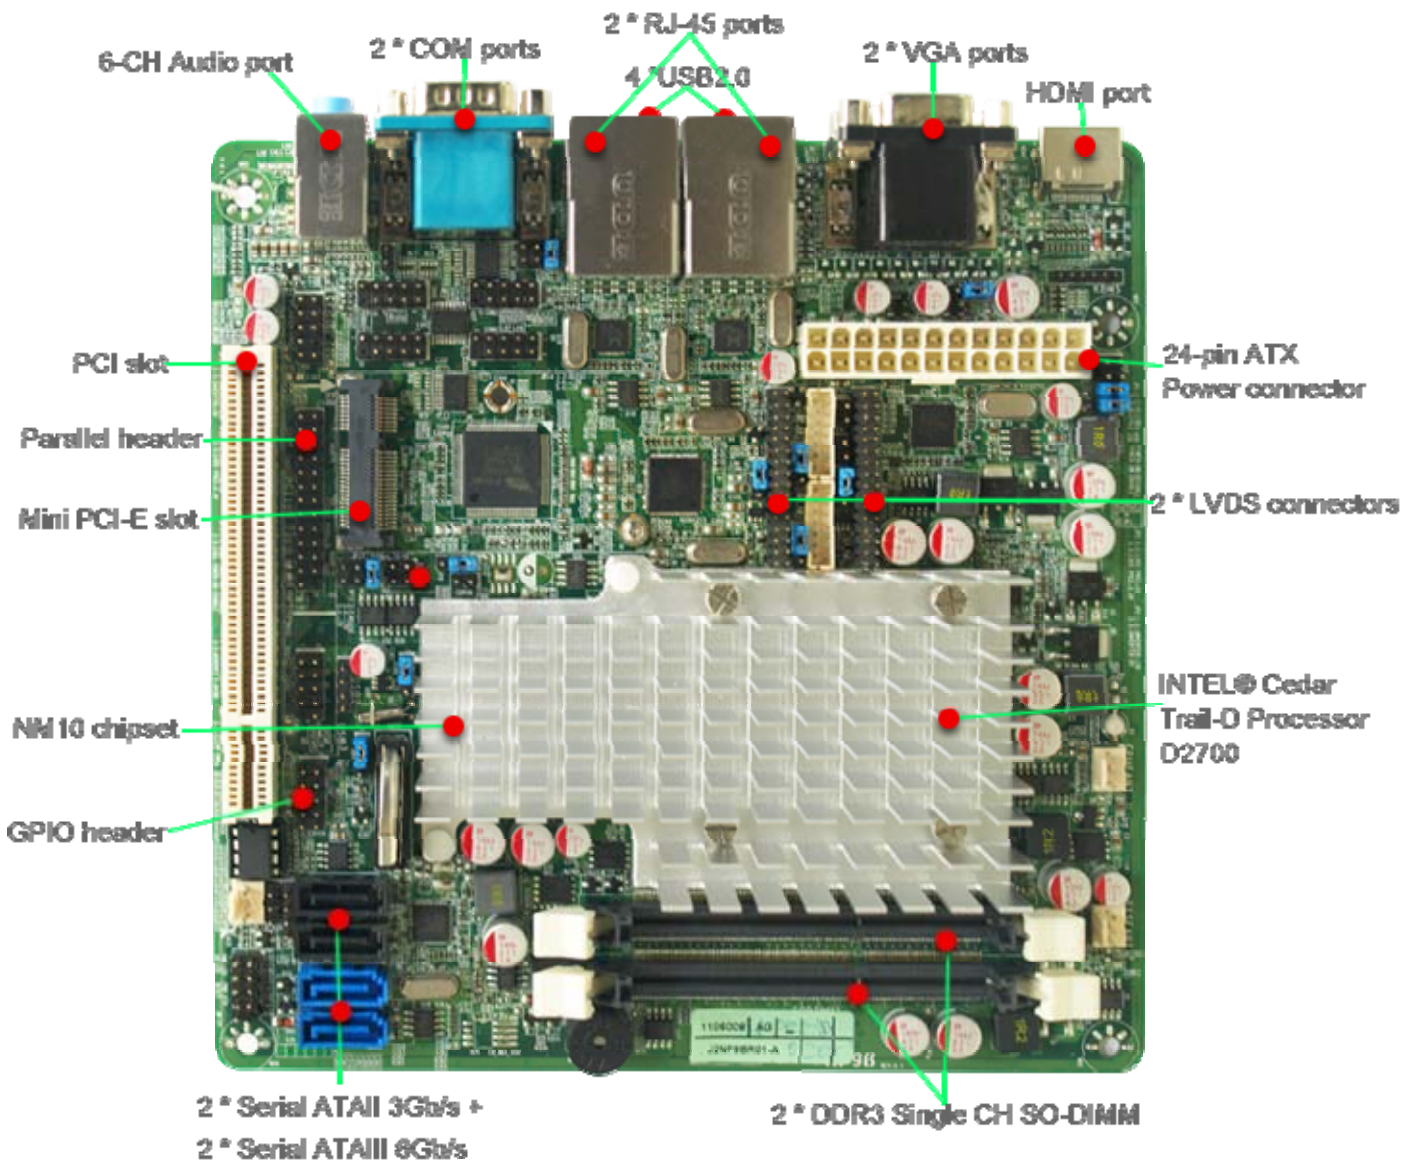

## Board Specifications

■ <b>CPU</b>	■ INTEL <sup>®</sup> Cedar Trail-D Processor D2550 CPU (1.86GHz)
■ <b>Chipset</b>	■ INTEL <sup>®</sup> ICH10R Express chipset
■ <b>Memory</b>	■ 2 * DDR3 1066MHz Single CH SO-DIMM up to 8GB
■ <b>Expansion Slots</b>	■ 1 * PCI slot ■ 1 * MINI PCI-E
■ <b>Storage</b>	■ 5 * Serial ATAI 3Gb/s with RAID 0, 1, 5 & 10 ■ 1 * mSATA (Selectable with Mini PCI-E)
■ <b>Audio</b>	■ Realtek ALC662 6-CH HD Audio CODEC
■ <b>Ethernet LAN</b>	■ 1 * Intel 82574L PCI-E Gigabit LAN
■ <b>LVDS</b>	■ Onboard 24-bits Dual channel connector
■ <b>USB</b>	■ Embedded 8 * USB 2.0/1.1
■ <b>Special Features</b>	■ Support ACPI S3 ■ Support CPU Smart FAN ■ Support Watch Dog
■ <b>Rear Panel I / O</b>	■ 4 * USB 2.0/1.1 ports ■ 1 * PS/2 port ■ 1 * RJ-45 port ■ 1 * COM port (COM1 for RS232/422/485) ■ 1 * VGA port ■ 1 * HDMI Port ■ 3 * Audio phone jack
■ <b>Internal I / O</b>	■ 3 * USB 2.0/1.1 headers for 6 USB 2.0 ports ■ 1 * Parallel header ■ CPU /NB / Chassis Fan connectors; ■ 1 * GPIO header & 1 Parallel headers ■ 1 * COM header ■ 1 * Chassis Intrusion header
■ <b>BIOS</b>	■ AMI 16MB UEFI DIP Flash ROM
■ <b>Form Factor</b>	■ Mini ITX Form Factor(170mm x 170mm)
■ <b>Functional</b>	■ NAS, Storage, Networking Appliance, NVR, DVR
■ <b>Certificate</b>	■ CE, FCC, RoHS
■ <b>Temperature</b>	■ Operating within 0~60 centigrade ■ Storage within -20-85 centigrade

\*For further information please visit the website at <http://www.jetway.com.tw>

\*The Specification may be changed without further notice.

## Product Accessories

