
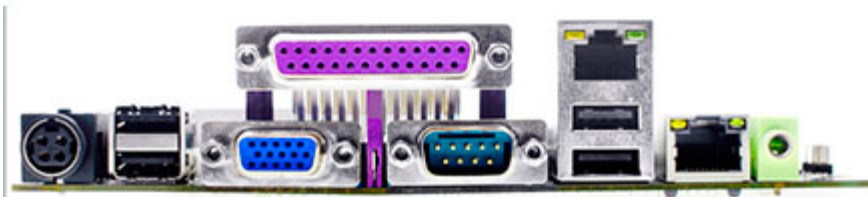


999.00 EUR
 incl. 19% VAT, plus [shipping](#)

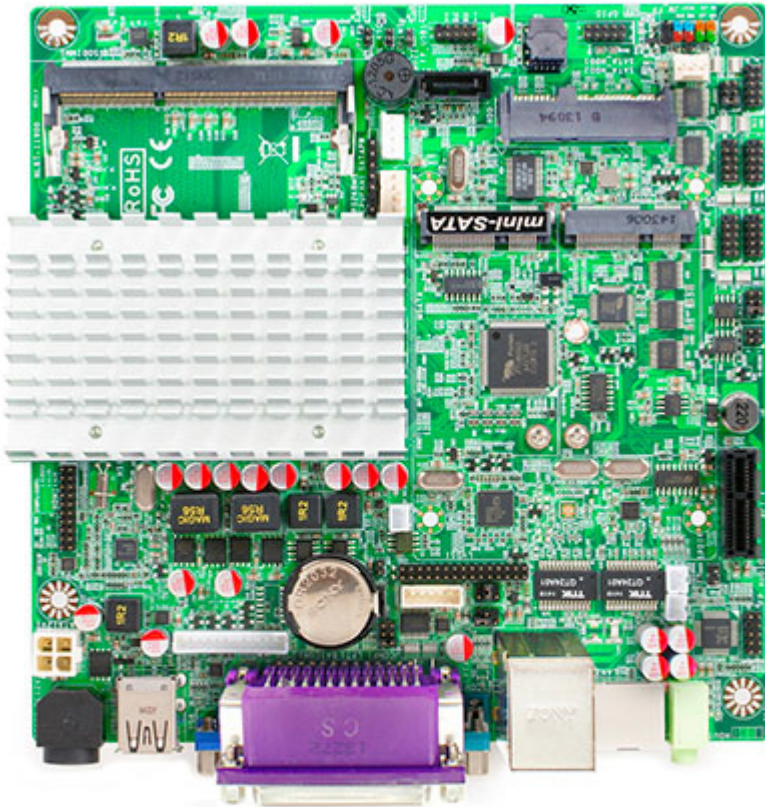

- INTEL Bay Trail I1900 / N2930 Quad Core processor
- Support DirectX 11 3D Graphics Acceleration
- Support DDR3L 1333
- Integrated HD Audio CODEC
- Support 1*PCI Express Gigabit LAN
- Support 1*USB3.0 port
- Onboard 1*MiniPCI-E connector
- Onboard 1 *M- SATA connector
- 2 Phase CPU Power Support
- Support Slim hard drive design
- Support Amplifier function(3W)
- Support Thunder Protection Function
- [Thin mini ITX](#) Form Factor(170mm X170mm)

• CPU-Chipset	<ul style="list-style-type: none"> • INTEL Bay Trail I1900 / N2930 Quad Core processor • INTEL® Bay Trail SOC chipset • 2 Phase CPU Power Support
• I.O Chipset	<ul style="list-style-type: none"> • Fintek® F71869A
• Memory	<ul style="list-style-type: none"> • 1* SO-DIMM slot • Support DDR3L 1333 • Max. capacity of system memory up to 8GB
• Expansion Slots	<ul style="list-style-type: none"> • 1* Mini PCI-E connector • 1* PClex1 slot

Storage	<ul style="list-style-type: none"> • 1* Serial ATA2 3Gb/s connector or 1*SATA +Power Connector(7+15Pin) • 1* M-SATA Connector
Audio	<ul style="list-style-type: none"> • AVLC887 Audio CODEC • HD Audio CODEC
Ethernet LAN	<ul style="list-style-type: none"> • Realtek® RTL8111G Chip • PCI Express Gigabit LAN
LVDS	<ul style="list-style-type: none"> • Onboard 24-bit Dual channel
USB	<ul style="list-style-type: none"> • 5* USB 2.0/1.1(3 distribute in back panel, 2 distribute in mid-board) • 1* USB3.0
Special Features	<ul style="list-style-type: none"> • Support CPU Smart Fan • Support Watch dog Technology • Support GPIO Technology • Support VGA header • Support Power On board • Support Amplifier function(3W) • Support Slim hard drive design • Support 1*RS422/RS485 COM header • Thunder Protection Function • All Solid Capacitor design • All Power Pack MOSFET design
Back Panel I / O	<ul style="list-style-type: none"> • 3* USB 2.0/1.1 ports • 1* USB3.0 port • 1* RJ-45 port • 1* Line-out port • 1* VGA port • 1* COM port • 1* 12V DC in
Internal I / O	<ul style="list-style-type: none"> • 1* USB 2.0/1.1 headers for 2 USB 2.0/1.1 ports • 2* CPU / Chassis Fan connectors • 5* COM headers(1*RS422/RS485) • 1* PS2/KB header • 1* 4-pin ATX 12V Power connector • 1* 4-pin SATA Power connector • 1* 12-pin VGA header • 1* 20-pin HDMI header • 1* 24-bit Dual Channel LVDS header • 1* GPIO header • 1* Mini PCI-e connector • 1* M-SATA Connector • 1* SATA +Power Connector(7+15Pin)(Option) • 1* Audio header • 1* Front panel header • 1* HDMI _SPDIF header
BIOS	<ul style="list-style-type: none"> • AMI 64MB DIP Flash ROM
Form Factor	<ul style="list-style-type: none"> • Thin mini ITX Form Factor(170mm X 170mm)